

ASWOOD PAVING

Revêtement Aswood




Infrastructure is essential. That is why there is a need for an environmentally-friendly approach.

Forest thinnings and fallen trees can be utilized as paving materials. Nichireki continues to build human- and nature-friendly roads by promoting recycling and reducing CO₂ emissions.


Overview

- ASWOOD PAVING is cold-mix pavement composed of wood chips and rubber-modified asphalt emulsion.
- ASWOOD PAVING can use wood chips made from tinned wood as the main material.
- ASWOOD PAVING is great for the environment thanks to cold-mix paving, higher water permeability and the use of recycled materials.
- ASWOOD PAVING is also great for people, providing excellent cushioning with elastic materials.

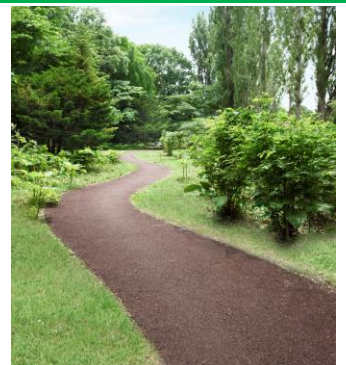

Features

- Cushioning ensures walking comfort.
- Higher water permeability means no puddles.
- It is excellent for energy conservation and environment preservation thanks to cold mixing and the use of recycled materials.

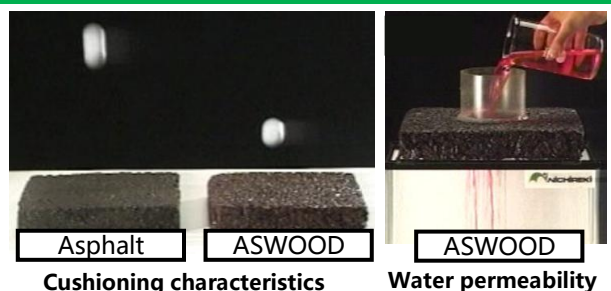

Cushioning characteristics

Water permeability

Applicable areas

- Walkways, garden paths, cycling roads, etc.
- Internal paving for various places, such as care houses, schools and stations.

